


# MULTIFUNCTION I/O CARD - MIO\_V I185000

## SPECIFICATIONS

- ♥ Two Serial ports (COM1, COM2 and Disabled)
- ♥ One Parallel ports (LPT1, LPT2, LPT3 and Disabled)
- ♥ One Game port
- ♥ One FDD port (can connect two floppy disk drivers, 360/1.2/720/1.44MB, 3.5"/5.25")
- ♥ One AT Bus HDD port
- ♥ AT Sixteen Bit slot

## JUMPERS & CONNECTORS

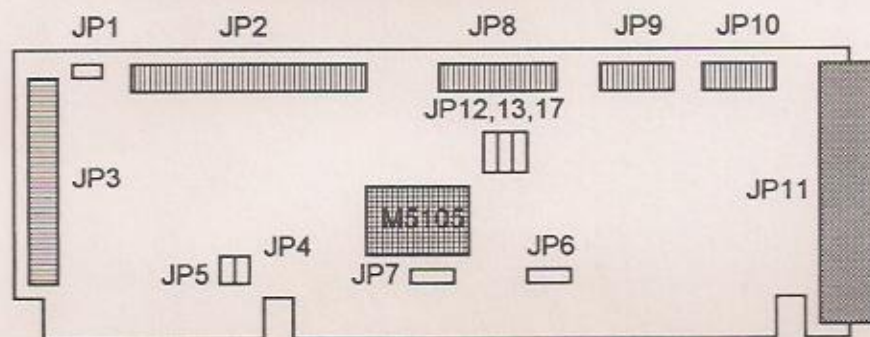

- JP1 : HDD LED connector
- JP2 : 40-pin AT Bus HDD port
- JP3 : 34 pin FDD port
- JP4, JP5 : Hard disk enable/disable (short/open)
- JP6, JP7 : Serial port selection
- | JP6 | JP7 | UART1 | UART2 |
|-----|-----|-------|-------|
| 1-2 | 1-2 | COM1  | COM2  |
| 1-2 | 2-3 | COM3  | COM4  |
| 2-3 | 1-2 | COM1  | COM4  |
| 2-3 | 2-3 | COM2  | COM3  |
- JP8 : 16 pin Game port
- JP9,10 : 9 pin serial port (COM2/COM1)
- JP11 : 25 pin parallel port
- JP12, JP13 : Parallel port selection
- | JP12 | JP13 | Configure |
|------|------|-----------|
| 1-2  | 1-2  | LPT2      |
| 1-2  | 2-3  | LPT1      |
| 2-3  | 1-2  | LPT3      |
| 2-3  | 2-3  | Disable   |
- JP17 : Floppy disk enable/disable (1-2/2-3)